

# Technical data sheet

## Clamp clip, triple, FT plastic pressure trough

Item number: 1162462



Suitable for all C profile rails with slot width 16–17 mm.  
Hot-dip galvanised steel clamp and bolt, polypropylene pressure trough, halogen-free, colour light grey RAL 7035.  
Version with welding and/or locknuts for use under difficult circumstances and for shake protection on request.



St

Steel

FT

Hot-dip galvanised

### Master data

Item number	1162462
Description 1	Clamp clip
Description 2	triple
Manufacturer	OBO
Dimension	40-46mm
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	25
Unit of quantity	Piece
Weight	19.8 kg
Weight unit	kg/100 pc.
CO Footprint (GWP) Cradle-to-Gate	0,4195 kg COe / 1 Piece


# Technical data sheet

## Clamp clip, triple, FT plastic pressure trough

Item number: 1162462



### Dimensions

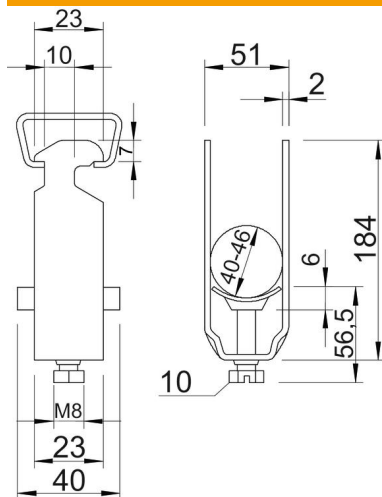

Dimension A	23 mm
Dimension B	51 mm
Dimension C	40 mm
Dimension G (mm)	M8
Dimension H	184 mm
Dimension L	56.5 mm
Dimension t	2 mm
Dimension x	6 mm

### Technical data

Number of cables/pipes	3
for rail with slot width (with interval), max.	17 mm
for rail with slot width (with interval), min.	16 mm
Halogen-free	yes
Max. Tightening torque	5 Nm
With plastic trough	yes
With metal trough	no
Mounting type	Profile rail
Impact-resistant	no
Clamping range D, max.	46 mm
Clamping range D, min.	40 mm
Surface addition	hot galvanised
Material addition	Steel
With counter-trough	no
Material of trough	Plastic
Material quality of trough	Polypropylene