### **Technical data sheet**

#### **GES4M-2** service outlet with handle clamp

**Item number: 7405191** 





Service outlet with handle clamp for up to 6 individual Modul 45 devices in 2 UT3  $\,$ universal supports, use in duct systems and system floors for indoor use.

Locking ladder made of galvanised sheet steel. The floor covering thickness is

set to 5 mm, adjustable to 10 mm if necessary.

Up to 4 installation devices with 50 mm central plate can be inserted.

Service outlet with handle clamp, 2-compartment, for the installation of MT4 mounting support. Two type APMT2 cover plates can be installed.





Stainless steel

#### Master data


Item number	7405191	
Туре	GES4M-2 10U	
Description 1	Service outlet	
Description 2	for universal mounting	
Manufacturer	OBO	
Dimension	223x223x70	
Material	Stainless steel	
Smallest sales unit	1	
Unit of quantity	Piece	
Weight	260 kg	
Weight unit	kg/100 pc.	
CO2 Footprint (GWP) Cradle-to- Gate	15,4339 kg CO2e / 1 Piece	

## **Technical data sheet**

### **GES4M-2** service outlet with handle clamp





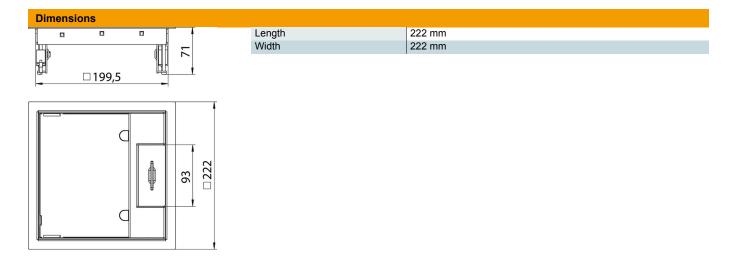

	ical	

Number of installable devices	6	
Number of mounting boxes	2	
Version for	Square	
Cable outlet version	Swivellable cord outlet	
Floor covering protection frame	yes	
Floor care	Dry	
Seal installation option	no	
Floor height, min.	78 mm	
Suitable for raised floor installation	yes	
Suitable for screed-flush closed underfloor ducts	no	
Suitable for screed-covered underfloor ducts	yes	
Suitable for cavity floor installation	yes	
Suitable for wet care	no	
Suitable for underfloor box	250/350	
Suitable for underfloor ducts	yes	
Device support to accept mounting boxes	yes	
Length of external dimensions	222 mm	
Length of installation dimensions	201 mm	
With floor covering recess	yes	
Nominal size for device installation units	4	
Frame version	Carpet protection frame	
Protection rating (IP) when used	IP20	
Protection rating (IP) when unused	IP40	
Protection rating IK code	IK10	
Heavy-duty version	no	
Clamping range D, max.	61 mm	
Clamping range D, min.	3 mm	
Installation system type	MT3 / GB2	

# **Technical data sheet**

# **GES4M-2** service outlet with handle clamp





Technical data		
	Vertical load, large area	to 5,000 N
	Vertical load, small area	to 3,000 N
	Approvals	VDE
	Opening mechanism	Handle
	Floor covering thickness	5 mm
	Floor covering thickness max.	10 mm