

# Technical data sheet

## Multi-Quick clip

Item number: 2153106



Flush-mounted clip to accept metric and PG pipes and Quick-Pipe® electrical installation pipes. Flexible clamping range of several millimetres. Universal fastening options on walls and ceilings and usable in a profile rail, both in indoor and protected outdoor areas. Toolless pipe mounting. Can also be arranged with OBO Quick clip or proQuick clip.



PA Polyamide

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 2153106                  |
| Type                               | M-Quick 15-19LGR         |
| Description 1                      | Multi-Quick clip         |
| Manufacturer                       | OBO                      |
| Dimension                          | 15-19mm                  |
| Colour                             | Light grey; RAL 7035     |
| Material                           | Polyamide                |
| Smallest sales unit                | 100                      |
| Unit of quantity                   | Piece                    |
| Weight                             | 0.545 kg                 |
| Weight unit                        | kg/100 pc.               |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0238 kg CO2e / 1 Piece |


# Technical data sheet

## Multi-Quick clip

Item number: 2153106



### Dimensions

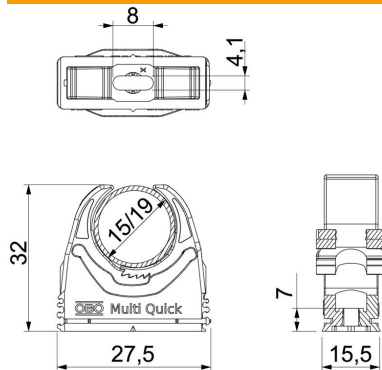

|             |         |
|-------------|---------|
| Dimension A | 27.5 mm |
| Dimension B | 15.5 mm |
| Dimension E | 8 mm    |
| Dimension F | 4.1 mm  |
| Dimension h | 7 mm    |
| Dimension H | 32 mm   |

### Technical data

|                         |                                                           |
|-------------------------|-----------------------------------------------------------|
| Expandable              | yes                                                       |
| Number of cables/pipes  | 1                                                         |
| Pull-out value          | 40 N                                                      |
| Fastening type          | Screw hole                                                |
| Flame-resistant         | acc. to VDE 0471/DIN 695 Part 2-1, test temperature 650°C |
| Closed                  | no                                                        |
| Halogen-free            | yes                                                       |
| With inlay              | no                                                        |
| Snap system             | yes                                                       |
| Quick clip installation | Durchgangsloch, auf M6 Gewinde aufschraubbar              |
| Clamping range D, max.  | 19 mm                                                     |
| Clamping range D, min.  | 15 mm                                                     |
| UV-resistant            | no                                                        |