

Lightning arrester MCF 35, 400/690 V, 1-pole with IR

Item number: 5096974



Lightning arrester type 1

- For lightning protection equipotential bonding to DIN EN 62305 (IEC 62305)
- Lightning current arresting capacity 35 kA (10/350) per pole
- Follow current extinguishing 50 kAeff, arrester back-up fuse up to 400 A gL/gG
- Encapsulated, non-extinguishing spark gap arrester for use in distributor housings
- Cut-off unit with visual indicator
- Remote signalling with potential-free changeover contact

Application: Without exception for 400/690 V network systems



AIG Cast aluminium

Master data

Item number	5096974
Type	MCF 35-1+FS-440
Description 1	LightningController
Description 2	single pole version
Manufacturer	OBO
Dimension	440V
Colour	aluminium
Material	Cast aluminium
Smallest sales unit	1
Unit of quantity	Piece
Weight	98 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	3,1644 kg COe / 1 Piece


Technical data sheet

Lightning arrester MCF 35, 400/690 V, 1-pole with IR

Item number: 5096974



Dimensions

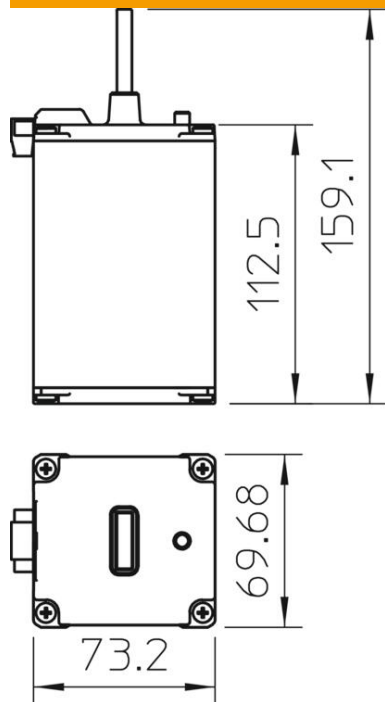


Technical data sheet

Lightning arrester MCF 35, 400/690 V, 1-pole with IR

Item number: 5096974



Technical data



Arrester surge current (8/20 µs) [total]	35 kA
Response time	<100 ns
Blow-out	no
Version for	1-pole
Pole version	1
Operating temperature, max.	85 °C
Operating temperature, min.	-40 °C
Lightning surge current (10/350 µs)	35 kA
Lightning surge current (10/350)	35 kA
Remote signalling	yes
FM contacts	Changeover
Follow current quenching capacity (eff) [N-PE]	50 kA
Follow current quenching capacity leff	50
Function/defect display	Visual
Maximum continuous voltage AC	440 V
Lightning protection zone LPZ	0→1
Max. mains-side overcurrent protection	400
Maximum back-up fuse	400 A
Nominal discharge current (8/20 µs)	35 kA
Nominal voltage AC (50/60 Hz)	400 V
Network form	TN
TN network form	yes
TN-C network form	yes
Test class, type 1	yes
Protection rating	IP20
Protection level	≤2,5
Signalling on device	Visual
SPD to EN 61643-11	Type 1
SPD to IEC 61643-1	Class I
Permitted temperature range, max.	85 °C
Permitted temperature range, min.	-40 °C