

Technical data sheet

Underfloor box with GES9UGE

Item number: 7427474



Square screed socket with GES9 UGE service unit for use in raised floors for indoor use. With pre-marked insertion openings for pipelines (M25) on all four sides.

In the as-delivered state, the installation housing is closed with a mounting protection lid.

The minimum installation depth is 64 mm.



PA Polyamide

Master data	
Item number	7427474
Type	RFB GES9 7011 BS
Description 1	Service outlet
Description 2	with raised floor housing
Manufacturer	OBO
Dimension	264x264x91
Colour	Iron grey; RAL 7011
Material	Polyamide
Smallest sales unit	1
Unit of quantity	Piece
Weight	290 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	9,1241 kg CO2e / 1 Piece


Technical data sheet

Underfloor box with GES9UGE


Item number: 7427474



Dimensions

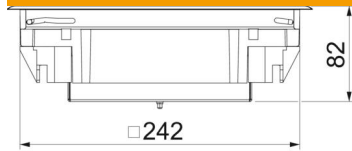

Length	264 mm
Width	264 mm

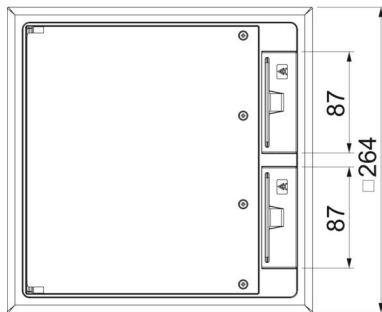

Technical data

Number of installable devices	6
Cable outlet version	Swivellable cord outlet
Floor care	Dry
Seal installation option	no
Suitable for raised floor installation	no
Suitable for cavity floor installation	no
Suitable for underfloor ducts	no
Nominal size for device installation units	9
Frame version	Carpet protection frame
Heavy-duty version	no
Opening mechanism	Handle