


Technical data sheet

Cable tray SKSU 110 FS

Item number: 6063497

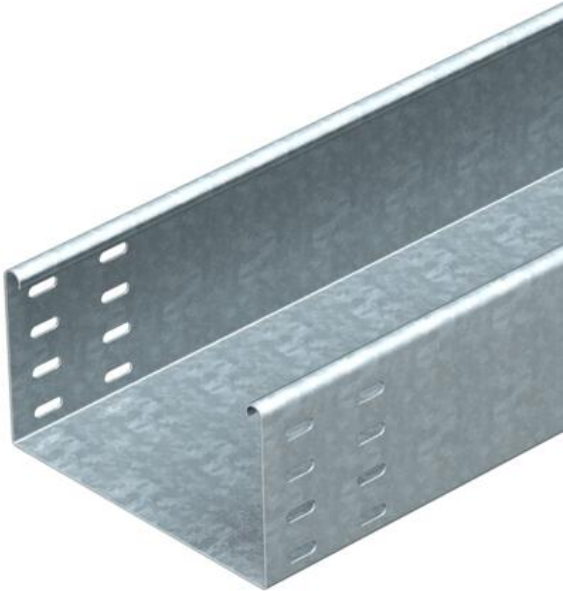

SKSU 110 = heavy-duty cable tray system, unperforated, with 110 mm side height.
The cable tray has connector perforations on both sides.
Straight connectors should be ordered separately and in the appropriate quantity.
Magnetic shield insulation without cover 20 dB, with cover 50 dB.



- St** Steel
- FS** Strip galvanized

Master data		
Item number	6063497	
Type	SKSU 150 FS	
Description 1	Cable tray SKSU	
Description 2	unperforated, connector holes	
Manufacturer	OBO	
Dimension	110x500x3000	
Colour	zinc	
Material	Steel	
Surface	Strip galvanized	
Surface standard	DIN EN 10346	
Smallest sales unit	3	
Unit of quantity	Metre	
Weight	872 kg	
Weight unit	kg/100 m	
CO2 Footprint (GWP) Cradle-to-Gate	19,6252 kg CO2e / 1 Meter	


Technical data sheet

Cable tray SKSU 110 FS

Item number: 6063497



Dimensions

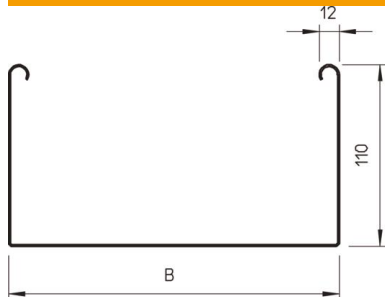

Dimension	110 x 500
Length	3,000 mm
Length	10 ft
Width	500 mm
Width	20 in
Height	110 mm
Height	4 in
Plate thickness	0.06 in
Plate thickness	1.5 mm
Dimension B	500 mm



Technical data

Connector version	Without connectors
Mounting system fastening type	Floor Ceiling Wall
Walkable	no
Maintain electrical functions	no
With cover	no
Mounting perforation in base	no
NATO hole pattern	no
Usable cross-section	548 cm ²
Usable cross-section	54800 mm ²
Rustproof steel, pickled	no
Side perforation	no
Wide-span version	no
Load test type according to IEC 61537	Type II
Type of connector, cable support system	Screwed

Technical data sheet


Cable tray SKSU 110 FS

Item number: 6063497



Loads

Insertable support spacings, min.	1.5 m
Insertable support spacings, max.	4 m
Support spacing 1.5 m	3 kN/m
Support spacing 2.0 m	2.4 kN/m
Support spacing 2.5 m	1.76 kN/m
Support spacing 3.0 m	1.2 kN/m
Support spacing 3.5 m	0.84 kN/m
Support spacing 4.0 m	0.8 kN/m

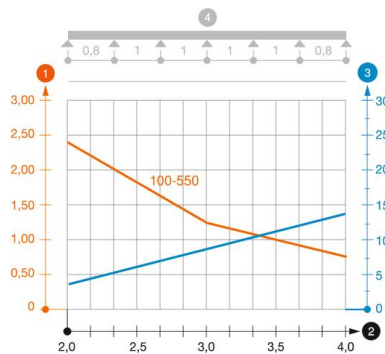

Load diagram, cable tray, type SKSU 110

- 1 Permitted cable tray/ladder load in kN/m without man load
- 2 Support width in m
- 3 Rail bend in mm at permitted kN/m
- 4 Load scheme during testing
- Load curve with cable tray/ladder width in mm
- Strut bend curve according to support width