

Technical data sheet

UTC4 W with 2+1 protective contact sockets

Item number: 7404623



The ready-for-connection UTC4 universal support has 2 pre-installed 33° protective contact sockets in orange and one pre-installed 33° protective contact socket in mint green and one blanking cover for retroinstallation of an installation device of the Modul 45 or Modul 45connect series, 250 V~, 16 A.

PVC connection cable with connector, 3-pin, type WINSTA® MIDI. Suitable for VL connection cables and device installation units of nominal size R7, R9 and 9. The ready-for-connection UTC4 universal support has 2 pre-installed 33° protective contact sockets in orange and one pre-installed 33° protective contact socket in mint green and one blanking cover for retroinstallation of an installation device of the Modul 45 or Modul 45connect series, 250 V~ 16 A. PVC connection cable with connector, 3-pin, type WINSTA® MIDI

PA

Polyamide

Master data		
Item number	7404623	
Type	UTC4 W OR2GN1	
Description 1	Universal supportConnectWINSTA	
Description 2	double white,single green	
Manufacturer	OBO	
Dimension	208x76x45	
Material	Polyamide	
Smallest sales unit	1	
Unit of quantity	Piece	
Weight	43.8 kg	
Weight unit	kg/100 pc.	
CO2 Footprint (GWP) Cradle-to-Gate	1,0965 kg CO2e / 1 Piece	

# Technical data sheet

## UTC4 W with 2+1 protective contact sockets


Item number: 7404623



### Dimensions



Length	218 mm
Width	76 mm
Height	60 mm

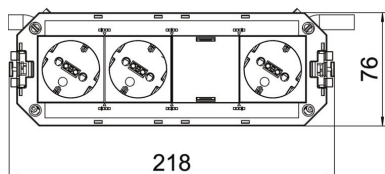

### Technical data

Connection cable, halogen-free	no
Number of installable devices	4
Version for	Double pure orange/single mint green
Cable length	300 mm
Line cross-section	2.5 mm <sup>2</sup>
Plug-in system	WINSTA® MIDI
Plug connector system, system-specific	yes
Circuit	2
System length	208 mm
Surge protection	no