

# Technical data sheet

## UTC4 W with 3+1 protective contact sockets

Item number: 7404621



The ready-for-connection UTC4 universal support has 3 pre-installed 33° protective contact sockets in white and one pre-installed 33° protective contact socket in orange, 250 V~, 16 A. With halogen-free connection cable. Suitable for VL connection cables and device installation units of nominal size R7, R9 and 9.

PVC connection cable with connector, 3-pin, type WINSTA® MIDI.  
The ready-for-connection UTC4 universal support has 3 pre-installed 33° protective contact sockets in white and one pre-installed 33° protective contact socket in orange, 250 V~ 16 A. With halogen-free connection cable.

PVC connection cable with connector, 3-pin, type WINSTA® MIDI

PA

Polyamide

Master data		
Item number	7404621	
Type	UTC4 W W3OR1	
Description 1	Universal supportConnectWINSTA	
Description 2	triple white,single orange	
Manufacturer	OBO	
Dimension	208x76x45	
Material	Polyamide	
Smallest sales unit	1	
Unit of quantity	Piece	
Weight	46.5 kg	
Weight unit	kg/100 pc.	
CO2 Footprint (GWP) Cradle-to-Gate	1,3346 kg CO2e / 1 Piece	


# Technical data sheet

## UTC4 W with 3+1 protective contact sockets


Item number: 7404621



### Dimensions



Length	218 mm
Width	76 mm
Height	60 mm

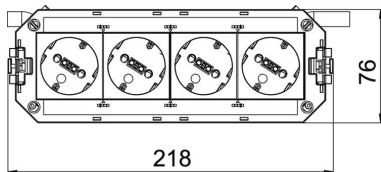

### Technical data

Connection cable, halogen-free	no
Number of installable devices	4
Version for	Triple pure white/single pure orange
Cable length	300 mm
Line cross-section	2.5 mm <sup>2</sup>
Plug-in system	WINSTA® MIDI
Plug connector system, system-specific	yes
Circuit	2
System length	208 mm
Surge protection	no